

VANDAELE[®] FORESTMASTER



VANDAELE FORESTMASTER - MULCHER

FOR EFFICIENT, PROFITABLE MANAGEMENT OF FORESTS, PLANTATIONS AND CLEARING FALLOW LAND.

- » A robust cage rotor with heavy-duty impact hammers that can retract 360°.
- » Mulches grass, brambles, shrubs, undergrowth, and wood up to 10 cm thick effortlessly.

Low power requirement and compact construction: also ideal for small and narrow tractors.

Long service life thanks to robust housing with protective chains, Hardox sliding soles, oversized transmission, and Waltersheid freewheel PTO.



FORESTMASTER 110

FORESTMASTER 150

FORESTMASTER 180



The Forestmaster range is available in three working widths, with fixed or adjustable linkage (except FRM110), and optional hydraulic rear door and/or tree-pushing bar.

THE FORESTMASTER IS USED FOR:

- » Maintenance of hunting paths and firebreaks in the forest.
- » Mowing and mulching of bushes and foothills in plantations
- » Protection against fire hazards in nature reserves
- » Preparing land for new planting or fencing



The Forestmaster is equipped with 1.5 kg heavy hammers that can rotate 360° in the cage rotor.

The hammer profile is specially designed for maximum impact force.

Made from high-quality steel, the hammers have a lifespan of up to 500 hours.





BENEFITS:

Multi-purpose: grass, brambles, small stumps, wood up to Ø 10 cm

Compact: maneuverability in plantations

Low power: thanks to the high-inertia rotor

Rotor safety: cage rotor allowing the hammers to swing back 360° safely

- » The solid hydraulic rear door is mounted on 3 hinges (2 on the FRM110) and tilts using two hydraulic cylinders.
- » The following options can be mounted on the Forestmaster, either at the factory or as a retrofit:

- Hydraulic rear door
- Mechanical or hydraulic tree-pushing bar

WATCH NOW



FORESTMASTER STANDARD EQUIPMENT:

- » Height adjustable slide soles
- » Safety chains in the front
- » Manual and spare parts list, CE-certificat included

PTO-DRIVEN:

- » Rear 3-point linkage Cat. II; driven at 540RPM.
- » Delivered with freewheel Walterscheid PTO shaft.
- » Transmission with 90° gearbox and belt drive.

HYDRAULIC DRIVEN:

- » Direct drive to the rotor by a hydraulic motor, adapted to the flow rate and available pressure


AVAILABLE OPTIONS:

- Cat. I and II 3-point suspension
- PTO speed 1000 RPM.
- Configuration for front linkage (PTO 1,000 counterclockwise)
- 500 mm hydraulic side shift
- Height-adjustable roller
- Lowered slide soles
- Additional protective flaps
- Hydraulic rear door
- Mechanically or hydraulically adjustable tree push bar
- Personalized RAL-coloring



Characteristics	110	150	180
Working width (mm)	1100	1520	1800
Total width (mm)	1480	1880	2180
Number of hammers	12	17	20
Min. tractor power HP/kW	30/22	40/30	70 /51
Weight	430	560	620
Exterior dimensions (LxWxH)	1480 x 785 x 920	1880 x 815 x 920	2180 x 815 x 920
Max. distance from hitch center	-	1.30 m	1.45 m

VANDAELE®

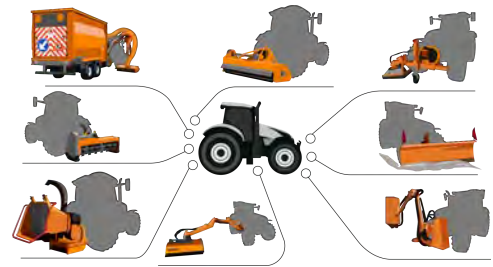

CONTACT



+32 56 66 45 01



Stationsstraat 119, 8780 Oostrozebeke, Belgium



info@vandaele.biz



www.vandaele.biz



FORESTMASTER